

I have received the Specifications for installing a meter base that has been bricked in and agree to accept terms. Dated: _____


Signature: _____

Print Name: _____



WARNING:

1. Ozark Electric is not responsible for any structural or cosmetic damages made to the structure during installation, operation or maintenance of meter and/or service wires.
2. Installation of service wires will not be made if wires do not easily pull into the meter base.
3. Meter Base must be furred out so locking mechanism has a minimum of 3/4" clearance.
4. Prior approval for use of the installation is required.
5. Riser & Sweep must both be secured to wall & foundation with a minimum of two straps with the lowest strap at the top of the sweep.

RESCINDED
NO LONGER APPROVED

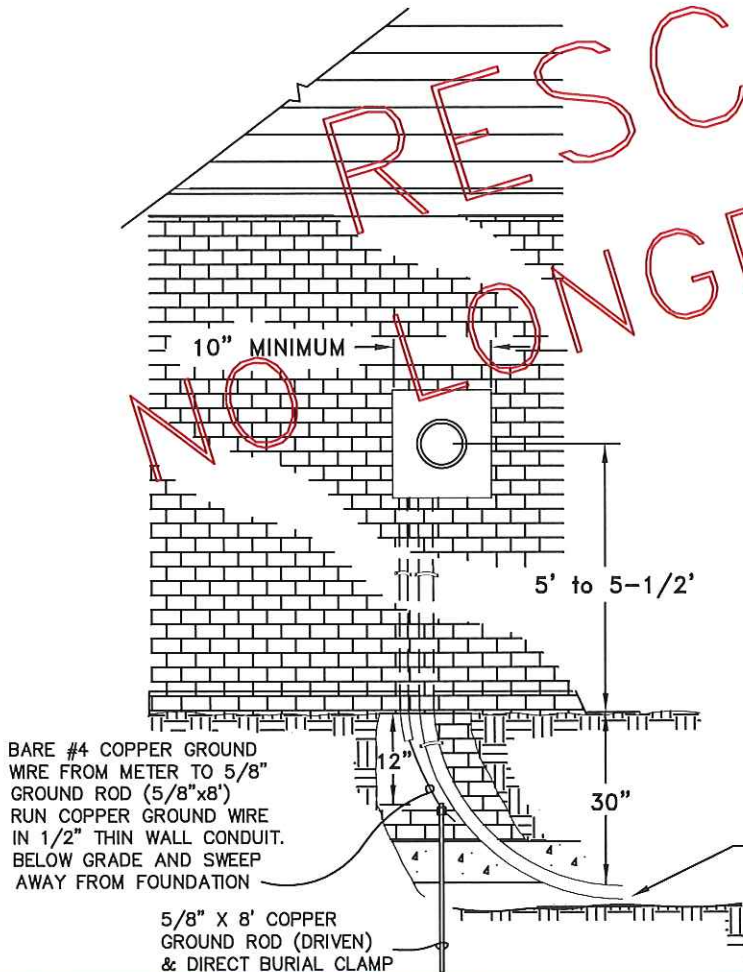

NOTE:
Clearance from Conduit Sweep to foundation footings must be maintained so Sweep rests firmly on the bottom of the trench. The Conduit Sweep shall not be altered in any way to accommodate this clearance. Sweep must maintain an unaltered 36" radius.

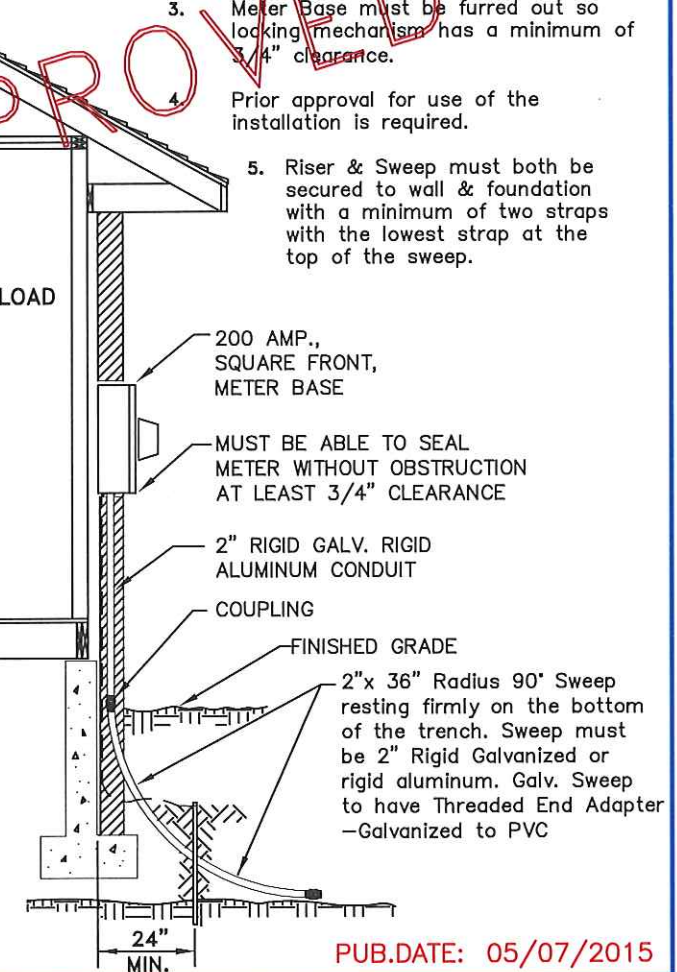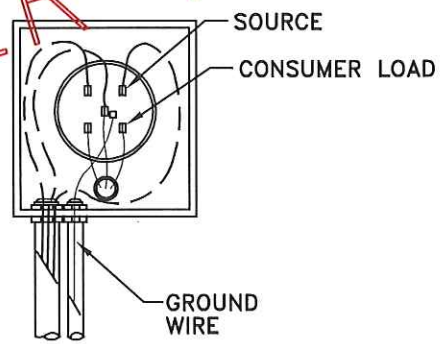

PUB. DATE: 05/07/2015

WARNING
OZARK ELECTRIC MUST REVIEW INSTALLATION PRIOR TO ANY BRICK BEING INSTALLED OVER THE CONDUIT AND AROUND METER BASE.

**SPECIFICATIONS
FOR
UNDERGROUND RESIDENTIAL SERVICE
W/ BRICKED-IN METER BASE**

9 OZARK ELECTRIC COOPERATIVE MT. VERNON, MISSOURI	
DRAWN BY: JM	DATE: 5/7/2015
CHECKED BY: KMR	SCALE: NONE
APPROVED BY:	SPEC-SH/UGS-FL-MT